


Introducing the **WITBH**— Blind Hole Mounted Cable Ties

Features and Benefits


- Barbed mounting head grips to the inside of a hole
- Ribs deflect when pushed into hole then spring back for a secure lock
- Easily inserted into threaded, non-threaded, drilled or punched hole
- Can be mounted to a variety of materials: wood, threaded metal, particle board, plastic, foam or rubber
- Reduces the number of inventoried parts by eliminating the need for a cable tie mount
- 22 Kg Tensile Strength
- Available in standard Nylon 6/6 and Heat Stabilized Nylon 6/6, serviceable to 141°C

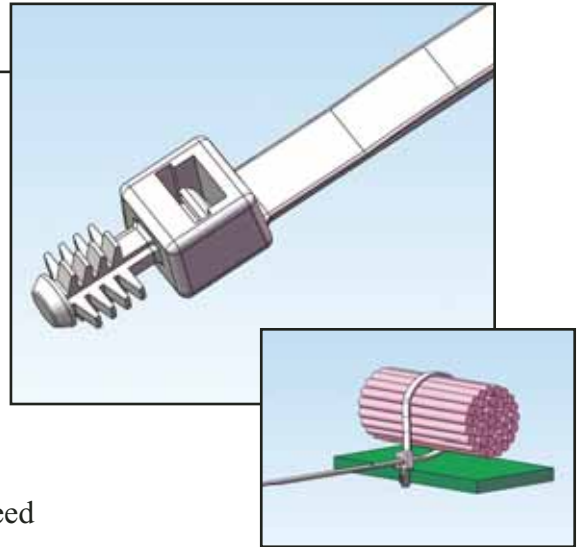

Markets

- Consumer Electronics
- Automotive
- White Goods
- Telecommunications
- Medical Equipment

Other Related Richco Product Solutions

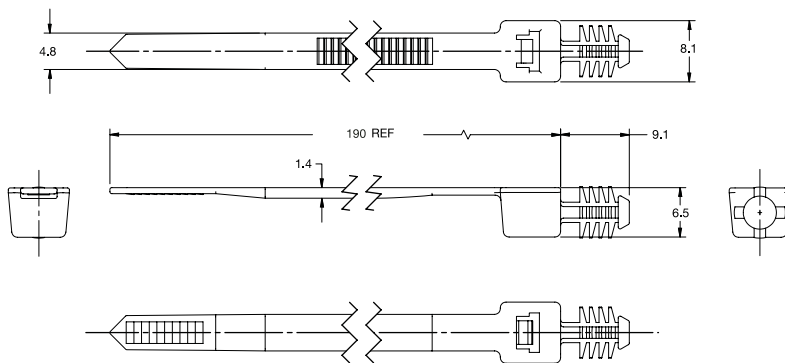

Part No.	Min. Loop Tensile Strength kg.	Max Bundle Dia	Hole Dia	Min Panel Thickness	Color	Material	Standard Pack
WITBH-50R	22	44.5	6.35	6.35*	Natural	Nylon 6/6, RMS-01	1,000
WITBH-50R-HS					Black	Heat Stabilized Nylon 6/6, RMS-47	
Other colors and materials are available by special order.							
*See Richco Engineering drawing for tolerance							




FOR FURTHER INFORMATION AND FREE SAMPLES PLEASE CONTACT YOUR LOCAL RICHCO OFFICE

- | | | | |
|----------------------|-----------------------|---------------|------------------------|
| Richco UK (Int'l HQ) | Tel: (44) 1474 327527 | Richco France | Tel: (33) 47208 7140 |
| Richco Benelux | Tel: (31) 334556262 | Richco Spain | Tel: (34) 90222 2250 |
| Richco Germany | Tel: (49) 8171 43280 | Richco Italy | Tel: (39) 051 6325 266 |
| Richco Finland | Tel: (358) 925221500 | Richco Sweden | Tel: (46) 845 99800 |



P/N	MATERIAL	COLOR
WITBH-50R	NYLON 6/6, UL94 V-2 (RMS-01)	NATURAL
WITBH-50R-HS	HEAT STABILIZED NYLON 6/6, UL94 V-2 (RMS-47)	BLACK

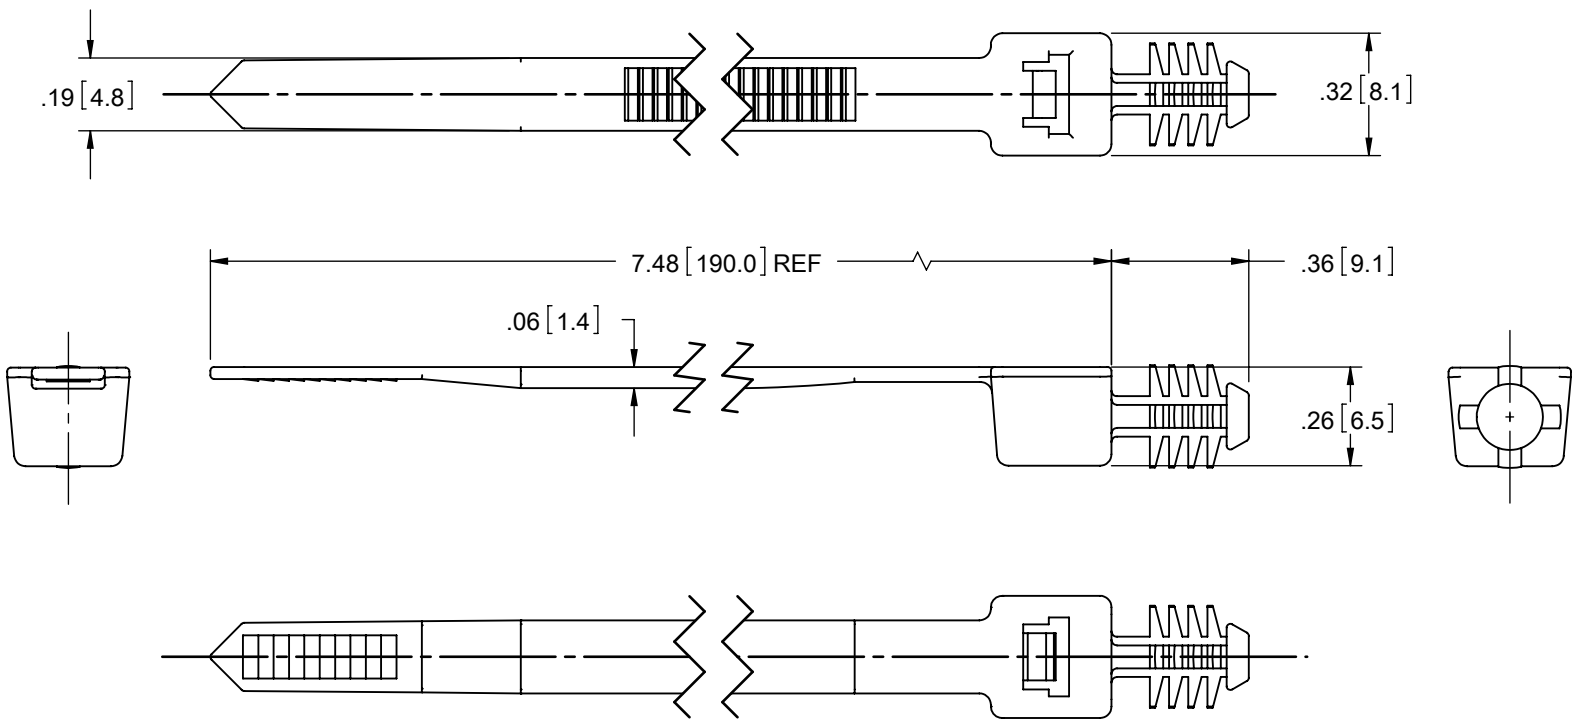

NOTES:
 1. TO PRESS-FIT INTO A .250+/-0.003 (6.35+/-0.08) HOLE @ .25 (6.35) MIN THICKNESS

A		RELEASED FOR PRODUCTION	SK	10/11/07	TITLE: WIT-50 WITH BLIND HOLE FIX						DWG IN IN [MM]	
REV.		DESCRIPTION	ENGR.	DATE	CREATED USING SOLIDWORKS	FILE #: WITBH-50	DWN: D.J.Z.	APP: D.J.Z.	FINAL			
					TOLERANCES UNLESS NOTED .XX=±.01 .XXX=±.005 .XXXX=±.0020 ANG.=±1°	SHEET: 1 OF 1	SHEET SIZE: A	DT: 08/01/2007	CHKD: SJ	PART #		PRINT TYPE
					RE: RICHCO INC. --	RICHCO, INC. ENG@RICHCO-INC.COM (773) 539-4060			WITBH-50R		CA	